

LYRASOM

PORTABLE POWER STATION

300W 252Wh




Universal Version



PRODUCT CERTIFICATION

UN38.3 / MSDS / BIS / UL1973(Cell) / CE(cell) / CB(cell)

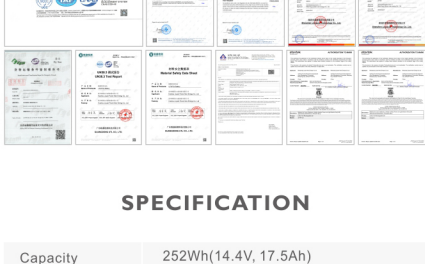

SPECIFICATION

Capacity	252Wh(14.4V, 17.5Ah)
Li-ion NCM, 76500mAh@3.6V	
Pure Sine Wave Output 300W Continuous, 600W Surge Max	
AC Output	110V/220V 50Hz/60Hz
Operating Temp	-10°C-40°C
Charging Temp	0°C-40°C
Weight	3.3KG
Size	220*170*210mm
INPUT	
DC Input	15V/4A, 60W max
Car Charge	12V/5A, 60W max
Solar Charge	12-24V, 60W max
OUTPUT	
2*DC Pot	12V/8A, 100W max
1*Car Port	12V/8.3A, 100W max
Wireless Charge Port	NO
2*USB-A	5V/2.4A*1, 18W*1 (QC 3.0)
1*USB-C(PD)	30W

MATCHING AND SCENARIO APPLICATION


300W 252Wh



Our portable solar panel offers high solar output, conversion efficiency rating, and a convenient folding design so it's ready to grab and go at anytime.




Charge with a portable power source for outdoor activities such as picnics



During an RV trip

FAST AND SAFE CHARGING AND DISCHARGING

Before using or storing the product, please charging it with charger. When charging, the indicator light will become yellow, and LCD will display the current charging proportion and charging power. Showing 100% power on the LCD means the battery has been fully charged. The charging process is about 6.5h and the current power can be got on LCD screen.

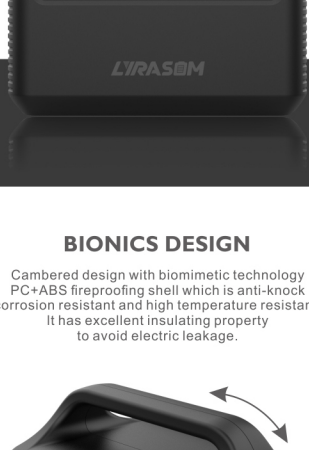

BIONICS DESIGN

Cambered design with biomimetic technology PC+ABS fireproofing shell which is anti-knock corrosion resistant and high temperature resistant. It has excellent insulating property to avoid electric leakage.



IDEAL SINUSOIDAL WAVE STABLE AND DAMAGE-FREE

Use sinusoidal wave electricity with stable waveform which can rival mains electricity. it is damage-free to the charging equipment and is able to provide safer and more reassuring using 3experience for users.

